

#AMU® "Allowance and Means for Undercut" Option

Eliminate owner expense - material and maintenance: +

Occupant comfort and safety:

- Inserts warranted never to wear out or pull out
- Auto-Adjust fins eliminate common maintenance adjustments
- Warranted not to interfere with self-close and self-latch

- Eliminates complaints from light and noise under door
- Warranties ensure sound control is maintained
- Ensures no light, sound and smoke around all 4 sides

★ Allows air to pass for positive pressure hallways with "air recovery" HVAC Design; or for bathroom fans and/or PTAC units requiring a non-ducted air supply.

★ Some ASHRAE Climate Zone Maps still require corridor some air assist. Consult DHSI

- Blocks light and provides sound attenuation.
- "AMU" are custom engineered designs by DHSI. DHSI will assist selection depending upon CFM requirements.
- Selection will determine the length of the fins, the number of rows of fins and the material used.

THE INDUSTRY
★ **INNOVATOR**
★ **ORIGINATOR**

Part no:

#AMU: Add "x AMU" to any door bottom
ORIGINALLY PATENTED BY DHSI




All DHSI door bottom seals are available with the patented "AMU"® option.

Cap Sweep with AMU option:

• **#CS 36 x AMU-3**


35 3/4" Cap Sweep with 3 fin AMU



AMDB3 Mortise Door Bottom with AMU option:

• **#AMDB3-2 x AMU**

35 3/4" AMDB3 with 2 fin AMU

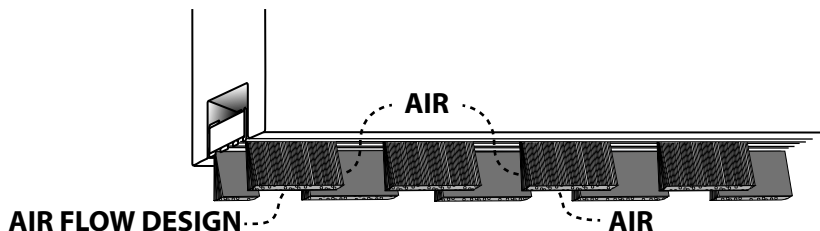

SSDB3 Surface Door Bottom with AMU option:

• **#SSDB3-2 x AMU**

35 3/4" SSDB3 with 2 fin AMU

