
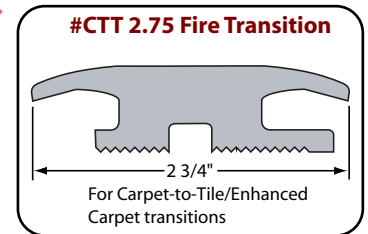
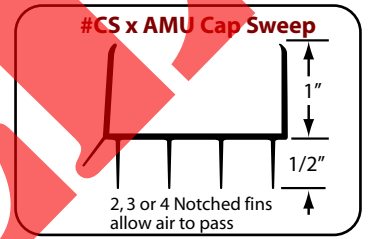
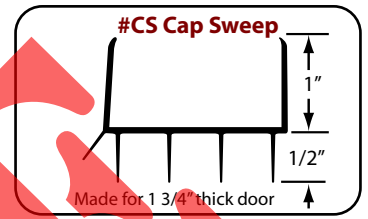


SUBMITTAL SHEET
CAP SWEEP PART #CS36 or #CS36 x AMU
WITH DHSI FIRE TRANSITION PART # CTT 2.75

PATENTS #7,062,881, 7,681,372, 8,051,605, 8,418,426 AND PATENTS PENDING CONSULT DHSI

DETAIL #CS-CTT
 (confirm revision date with DHSI)

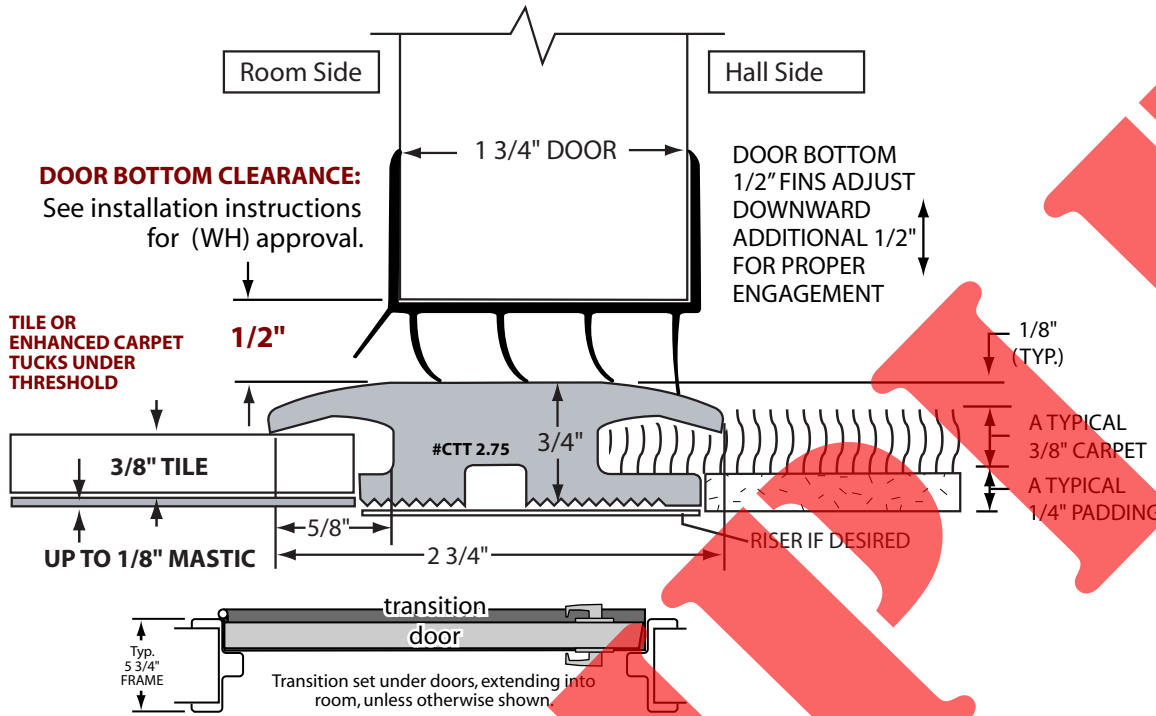

Complete as much information as possible and attach with submittals.
"Approval" as noted is required for order entry and warranty

1. Padding is separate from carpeting on one side and tile or enhanced carpet on the other for all openings? **YES** **NO** If NO, explain in comments below.
2. Thickness of flooring material shown is correct? **YES** **NO**
3. Is "Allowance and Means for Undercut" option for airflow under door needed? **YES** **NO**
 If you require "AMU", minimum CFM Required:
 If AMU is required DHSI can provide an architectural detail with 3/4" fins for approval.
4. Door Undercut is approved? **YES** **NO** APPROVED BY: GC ARCH OWN
5. Confirm color of Door Bottom? Dark Brown Off-White Black
6. Furnish FA/SB (Frame Alignment / Security Brackets) ? **YES** **NO**
7. Transition Strip Color? Black Dark Brown

NOTES:

1. Cap Sweep listed up to 90 minutes by ITS (WH).
2. Doors without "AMU" option may use #DP Decibel Plug to increase STC ratings: see specs & HW sets.
3. Minimum 1/8" rise from top of carpet in room to top of transition under door.
4. Minimum clearance for CS shown is 3/8". Consult DHSI for details that may require smaller clearances.
5. #CTT Transition by DHSI. Set threshold with 3/4" extension into room unless otherwise indicated.
6. 1/16" engagement recommended to transition which will produce minimal closing interference.
7. Timely/Rediframes can be 3/16" longer than the standard hollow metal frame. You may need to deduct this 3/16" from the undercut dimensions to achieve the correct dimensioning.

DOOR UNDERCUT

SUBMIT BY DISTRIBUTOR

CTT 2.75 TRANSITION 3/4"

RISER (IF USED) +

CLEARANCE - SEE DRAWING +

= UNDERCUT OF DOORS =

ACTUAL WIDTH OF DOOR

OPTIONAL: QTY REQUIRED

Approval by Architect, Contractor or Owner Rep:

APPROVED: AS SUBMITTED
 EXCEPTIONS AS NOTED
NOT APPROVED: REVISE AND RESUBMIT

COMMENTS:

APPROVAL BY: _____
 FIRM: _____
 DATE: _____

PROJECT NAME: _____
 LOCATION (CITY/STATE): _____